

# *Dimmer Dot* - Variable AC Voltage Auto Transformer

**Single Phase - (P) Portable / Bench Top - Air Cooled - Manual**



2A to 15A  
with output post terminals  
Aust Input AC lead and plug




20A to 28A



D-841-P

## SPECIFICATIONS


Single Phase (P) Portable / Enclosed						
Input: 230 / 240 volts 50Hz						
Output: 0 - 260 / 270 volts						
Type	Nominal Amps	Cont. Amps	H	W	L	Wt
D- 21-P	2	1.9	155	155	145	4.5
D- 41-P	4	3.9	190	255	195	9
D- 81-P	8	7	220	255	195	11
D-101-P	10	9	215	250	215	14
D-151-P	15	12	230	265	240	18
D-201-P	20	17	265	325	270	22
D-281-P	28	23	265	380	315	31
D-841-P	84	63	670	440	360	98
All dimensions (mm) & weights (Kg) are approx. only						

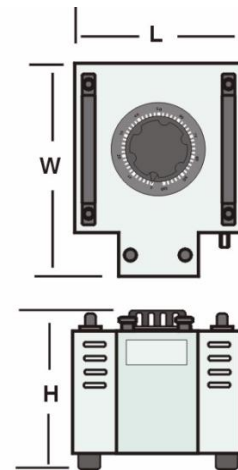

# *Dimmer Dot* - Variable AC Voltage Auto Transformer

**Single Phase - (P) Portable / Bench Top - Air Cooled - Manual**

## CIRCUIT DIAGRAM

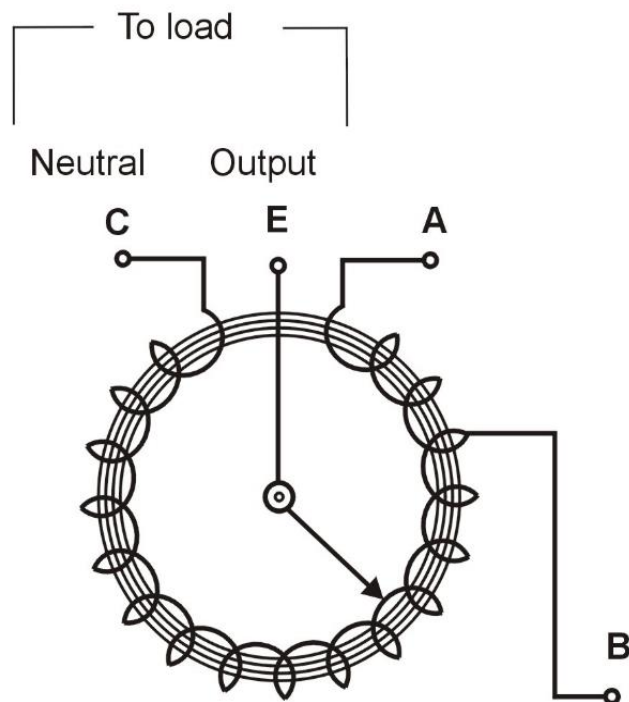

230 / 240 Volt AC 50Hz Line Input to **A** for 'Line voltage' Output  
230 / 240 Volt AC 50Hz Line Input to **B** for 'Over voltage' Output